

Output Ratings

Generating Set Model	P2000	P2200E
380-415V, 50Hz	2000.0 kVA 1600.0 kW	2200.0 kVA 1760.0 kW
220/127V, 60 Hz	-	-

Ratings at 0.8 power factor.

Ratings Definitions

Prime Power - Model P2000

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Power - Model P2200E

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Technical Data

Engine Make & Model:	Perkins 4016TAG2A	
Alternator Model:	LL9124H	
No. of Cylinders/Alignment:	16 / Vee	
Displacement: litres (cu.in)	61.1 (3730.0)	
Bore/Stroke: mm (in)	160.0 (6.3)/190.0 (7.5)	
Compression Ratio:	13.6:1	
Induction:	Turbocharged Air To Air Charge Cooled	
Frequency:	50 Hz	60 Hz
Engine Speed:	1500 RPM	-
Gross Engine Power: kW (hp)	1937.0 (2597.6)	-
BMEP: kPa (psi)	2535.2 (367.7)	-
Piston Speed: m/sec (ft/sec)	9.5 (31.2)	-
Fuel Tank Capacity: litres (US gal)	-	-
Fuel Consump, P2000 l/hr (USg/hr)	423.5 (111.9)	-
Fuel Consump, P2200E l/hr (USg/hr)	474.1 (125.2)	-
Heat Rejected to Exhaust System: kW (Btu/min)	1490.0 (84735)	-
Heat Rejected to Water & Lube Oil: kW (Btu/min)	721.0 (41003)	-
Heat Radiation to Room: kW (Btu/min)	231.0 (13137)	-
Exhaust Gas Temperature: °C (°F)	493 (919)	-
Radiator Cooling Air Flow: m ³ /min (cfm)	2058.0 (72678)	-
Combustion Air Flow: m ³ /min (cfm)	145.0 (5121)	-
Exhaust Gas Flow: m ³ /min (cfm)	387.0 (13667)	-

* Contact your local FG Wilson dealer for power ratings at specific site conditions.

Dimensions and Weights


Length: mm (in)	Width: mm (in)	Height: mm (in)	Dry: kg (lb)	Wet: kg (lb)
5725 (225.4)	2300 (90.6)	3020 (118.9)	15500 (34172)	15700 (34613)

Dry = With Lube Oil Wet = With Lube Oil and coolant

Ratings in accordance with ISO 8528, ISO 3046, IEC 60034, BS5000 and NEMA MG-1/22. Generating set pictured may include optional accessories.



www.3tech.net

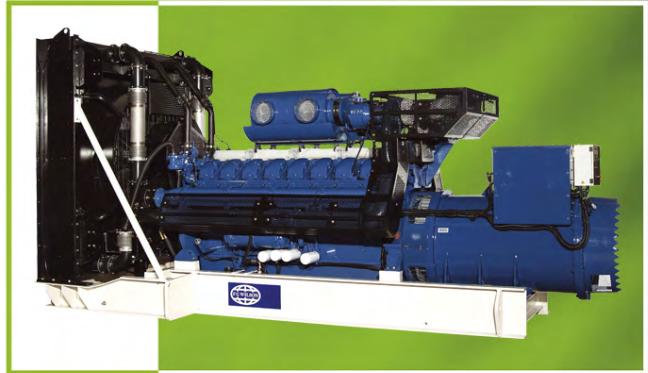

P2000 / P2200E



3Tech Corporate Limited
 Unit 904, 9/F., Fu Hang Industrial Building,
 1 Hok Yuen Street East, Hung Hom,
 Kowloon, Hong Kong.
 Tel: +852-2766 9787 Fax: +852-2766 9774
 Email: sales@3tech.net

Headquarters: Hong Kong China: Beijing, Dongguan, Shenzhen, Xiamen
 Overseas: Nigeria, D.R.Congo, Ghana, Kenya, Tanzania, Pakistan, USA, Canada, France



ISO 9001:2008
 Certificate No. 194845

